






Mobile Water Treatment System



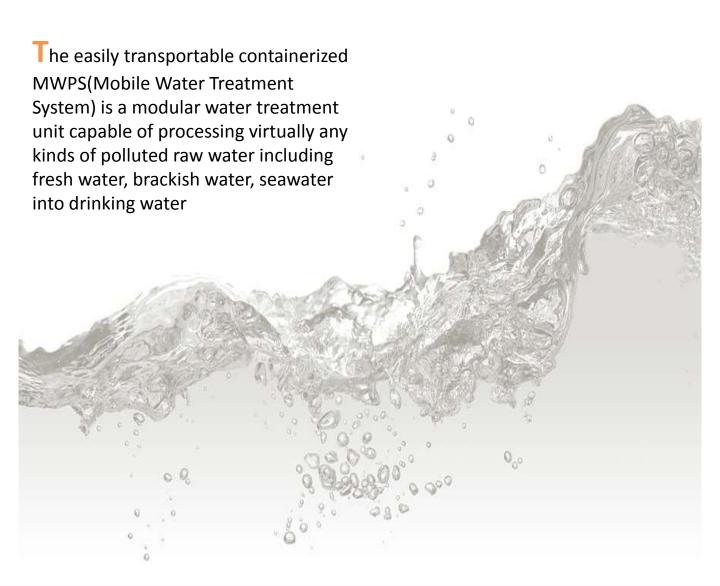

Mobile Water Treatment System KRO-012-MTS

APPLICATION

- Seawater desalination
- Brackish water treatment
- Military and disaster relief

WATER QUALITY

 Meets or exceed drinking water quality of latest edition of STANAG2136

CAPACITY

- From Seawater
 - : 12ton/day
- From Brackish water
 - : 15ton/day

SPECIFICATION

- Dimensions
 - : 2,090 x 1,106 x 1,540 mm
- Weight
 - : 1,100 kg
- Power Consumption
 - : 7.5 kW
- Electric Generator
 - : Diesel Engine







END USER / YEAR

- DSTA, Singapore Armed Forces
- Deployed in 2011

- Small footprint and transportable
- Ultra Light Weight: Heli or Truck transportable
- Low energy consumption with high production
- Anywhere in the world
- Safe, quick, and reliable



Mobile Water Treatment System KRO-040-MTS

APPLICATION

- Seawater desalination
- Brackish water treatment
- Military and disaster relief

WATER QUALITY

 Meets or exceed drinking water quality of latest edition of STANAG2136

CAPACITY

- From Seawater
 - : 40ton/day
- From Brackish water
 - : 72ton/day

SPECIFICATION

- Dimensions
 - : 4,000 x 2,100 x 1,600 mm
- Weight
 - : 4,641 kg
- Power Consumption
 - : 21.6 kW
- Electric Generator
 - : Diesel Engine







END USER / YEAR

- DSTA, Singapore Armed Forces
- Deployed in 2011

- Compact and transportable
- Fully self contained automatic system
- High capacity
- Light weight: Truck or Trailer mounted
- Safe, quick, and reliable



*Mobile Water Treatment System*KRO-050-MTS

APPLICATION

Disaster relief

WATER QUALITY

 Meets or exceed drinking water quality of latest edition of WHO standard

CAPACITY

■ 50 ton/day

SPECIFICATION

Power Consumption

UF UNIT

: 2,300 x 1,900 x 2,000 mm

RO UNIT

: 2,000 x 1,900 x 1,800 mm

Weight

UF UNIT

: 1,300 kg

RO UNIT

: 1,600 kg

Power Consumption

: 30kW











END USER / YEAR

- Japan Water Agency (JWA)
- Deployed in 2013

DESIGN CONCEPT

■ System Consist: UF UNIT + RO UNIT

Compact design

Easy installation and operation



*Mobile Water Treatment System*KRO-135-MTB

APPLICATION

- Brackish water treatment
- Military and Industrial use

WATER QUALITY

■ Less than 500 ppm TDS

CAPACITY

- From Brackish water
 - : 135ton/day

SPECIFICATION

- Dimensions
 - : 4,500 x 2,400 x 2,500 mm
- Weight
 - : 4,500 kg
- Power Consumption
 - : 15.0 kW
- Electric Generator
 - : Diesel Engine (optional)



END USER / YEAR

- ROK Army
- Deployed from 1999

- Truck integrated system
- Specially designed for military applications
- Quiet and vibration Free
- Urgent drinking water supply during warfare
- Field proven design : system in service for over 10 years



Mobile Water Treatment System KRO-029-MIS

APPLICATION

Disaster relief

WATER QUALITY

 Meets or exceed drinking water quality of latest edition of WHO standard

CAPACITY

29 ton/day

SPECIFICATION

- Dimensions
 - : 1,450 x 600 x 900 mm
- Weight
 - : 154 kg (at dry)
- Power Consumption
 - : 0.95 kW







END USER / YEAR

- Toray Industries
- Deployed in 2014

- System Consist : Cartridge Filter + BWRO
- Compact design
- Easy installation and operation



Containerized Water Purification Unitfor KOLON Environment Service

APPLICATION

Drinking Water supply

WATER QUALITY


 Meets or exceed drinking water quality of latest edition of WHO standard

CAPACITY

■ 150 ton/day

SPECIFICATION

- Dimensions
 - : 2,390 x 5,990 x 2,580 mm
- Weight
 - : Approx. 5,000 kg Including Container
- Power Consumption
 - : 8.5 kW
- Equipment control
 - : PLC Control w/ Touch PC

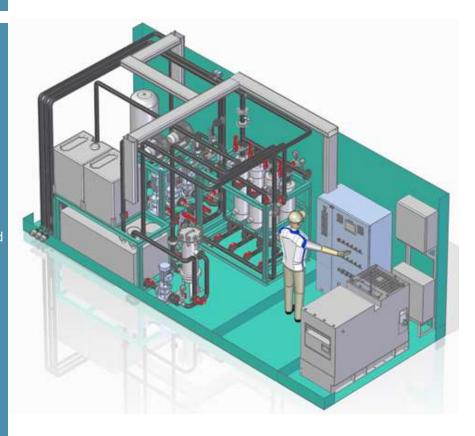

END USER / YEAR

- KOLON ENVIRONMENT SERVICE
- Ruhabat Etrap, Ahal Valayat, Turkmenistan
- Deployed in 2011

- Easily installable modular System
- Mobile water treatment system
- Ultra Filtration (UF) system





Seawater Desalination Pilot Plant for GS Eng. & Const.

APPLICATION


- Research and Development
 - : Mineral water production

CAPACITY

- From Seawater
 - : 38ton/day
- From Brackish water
 - : 20ton/day

SPECIFICATION

- Dimensions
 - : 3,120 x 6,000 x 2,100 mm
- Weight
 - : Approx. 1,600 kg
- Power Consumption
 - : 22 kW
- Equipment Control
 - : HMI with PLC Control

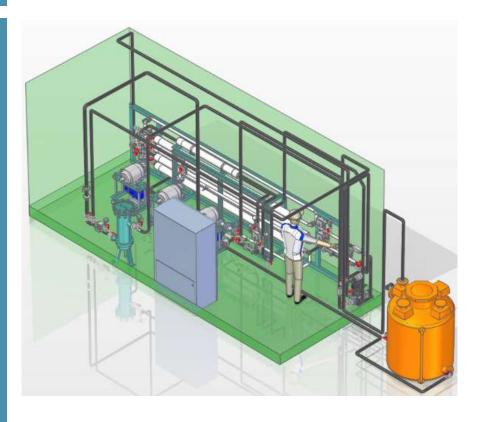

END USER / YEAR

- GS Engineering & Construction
- Jeju Island, Korea
- Deployed in 2011

- 2-Pass RO Unit : SWRO, BWRO
- Nano Filtration (NF) Unit for Natural Mineral Separation
- HMI system for DATA COLLECTION





Mobile Water Treatment System KRO-100-MCB

APPLICATION

Disaster relief

WATER QUALITY

Meets or exceed drinking water quality of latest edition of WHO standard

CAPACITY

■ 50 ton/day

SPECIFICATION

Power Consumption

UF UNIT

: 2,300 x 1,900 x 2,000 mm

RO UNIT

: 2,000 x 1,900 x 1,800 mm

Weight

UF UNIT


: 1,300 kg

RO UNIT

: 1,600 kg

Power Consumption

: 30kW

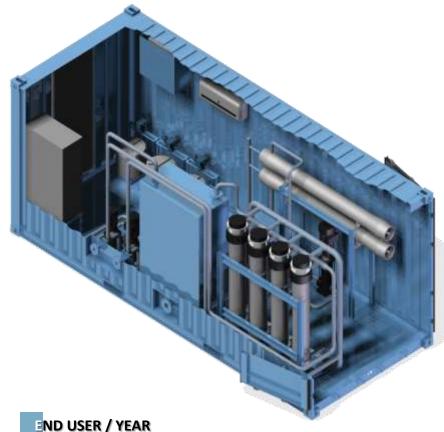

- Japan Water Agency (JWA)
- Deployed in 2013

DESIGN CONCEPT

System Consist: UF UNIT + RO UNIT

Compact design

Easy installation and operation





Mobile Water Treatment System For KICT

APPLICATION

■ Mobile Water Treatment

WATER QUALITY

 Meets or exceed drinking water quality of latest edition of WHO standard


CAPACITY

- From Seawater
 - : 50 ton/day

SPECIFICATION

- Dimension
 - : 5,898 x 2,350 x 2,392 mm
- Weight
 - : 1,400 kg
- Power Consumption

: 15 kW

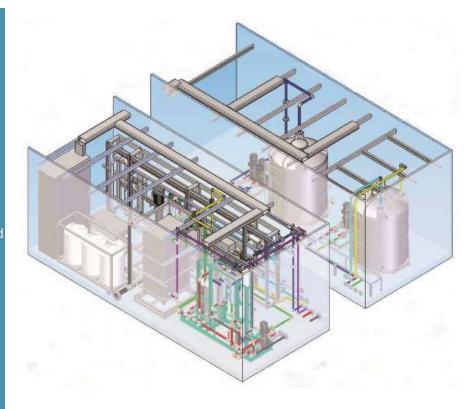

END USER / YEAR

- KICT(Korea Institute Construction Technology)
- Paju city, Korea
- Deployed in 2013

- System consist : MF UNIT + RO UNIT
- Compact design
- Easy installation and operation





Mobile Water Treatment System For KICT

APPLICATION

■ Mobile Water Treatment

WATER QUALITY

 Meets or exceed drinking water quality of latest edition of WHO standard

CAPACITY

- From Seawater
 - : 50 ton/day

SPECIFICATION

- Dimension
 - : 5,350 x 1,160 x 1,500 mm
- Weight
 - : 600 kg
- Power Consumption

: 1 kW



END USER / YEAR

- KICT(Korea Institute Construction Technology)
- Ulaanbaatar, Mongolia
- Deployed in 2013

- System consist : DMF UNIT + UV UNIT
- Compact design
- Easy installation and operation





Mobile Water Treatment System for Bangladesh Residents

APPLICATION

Drinking & Utility water for Bangladesh residents

WATER QUALITY

- Less than 500 ppm TDS
- Meets or exceed drinking water quality of latest edition of WHO and NSF Standard

CAPACITY

- From Brackish Water
 - : 16 ton/day

SPECIFICATION

- Dimensions
 - : 2,800 x 1,500 x 1,650 mm
- Weight
 - : 1,024 kg (at dry)
- Power Consumption
 - : 8.5 kW







END USER / YEAR

- MHI-TES

 (Mitsubishi Heavy Industries Transportation Equipment Engineering & Service)
- 30 Units deployed in 2014
- Bangladesh

- System Consist
- : UF Unit + BWRO Unit + CIP Unit(Separate Station)
- 2ton truck mounted type
- Compact design & Light weight